


# ***Mamibot***

## **Mattress UV Cleaner**

UVLITE 100 Professional Mite Killer

## **USER MANUAL**

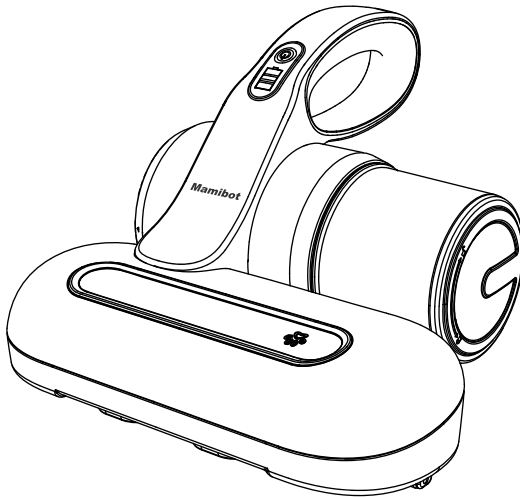

## Before Using

### Products Introduction

The Mamibot UVLITE 100 is an UV vacuum cleaner for cleaning mattress, sofa, beds, curtain, pillow and other fabric materials. The wavelength of the UV is 253.7nm which can kill germs, viruses, microbes, dust mite, etc., and the vacuum will suck the dead bodies of dust mites via 4000PA vacuuming power. We wish that this vacuum cleaner will help you build a healthy and comfortable living style.

### Safety Instructions

#### READ ALL INSTRUCTIONS BEFORE USING THIS APPLIANCE


To reduce the risk of fire, electric shock or injury:

1. Do not let children use this product.
2. Do not exposure the UV lamp to humans, plants, animals directly, and if too long exposure makes uncomfortable, go to a doctor immediately.
3. Do not stare at the UV lamp when it is lighting. Please don't use other lamp with light source to illuminate the UV lamp when UV lamp is lighting, because this may cause damage to the UV lamp.
4. This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge only if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.
5. Children shall not play with the appliance.
6. Cleaning and maintenance shall not be made by children without supervision
7. In case the UV lamp shines eyes of yours by accident during application and causes any uncomfortable symptoms, please go to doctor immediately.
8. If the supplied cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
9. Never install a wet dust box or wet filter to the machine ,that will damage the machine.
10. Never use this device to vacuum any objects of high temperature like hot ashes or burning cigarette butts, inflammable and explosive articles (gas, alcohol), chemical objects, big debris like glass fragments, iron nails, etc.
11. Don't vacuum any objects that may block the air channel of device. If you find it is blocked with lower vacuuming power, please clean the dust box and then use.


# Why Mamibot UVLITE 100?

## Cordless Professional UV Vacuuming System that


Cleans Mattress, Sofa, Curtain, Pillow, Bed, and other Fabric materials that with the need of mite/bacteria killing. It can eliminate 99.99% dust mites with the 9W U-Type UV Lamp.




**Cordless design**  
Convenient to use




**U-type UV lamp**  
Kill 99.99% mites



**Dual flapping pads**  
Drive mites out




**Metal Filter and Hepa Filter**  
Block 99.97% dust to avoid  
2nd time air pollution



**One-press Design**  
Easy to operate



Dust mites and their waste are the main causes of allergy and asthma symptoms. Also every animal including human being releases a lot of skin rashes that may hide on your bed, sofa, floor, and even in the air. Allergy symptoms like runny nose, sneezing and coughing will be annoying your life seriously. That will disrupt your ability to breathe easily and cause sleep disruptions.

# To know your Mamibot UVLITE 100

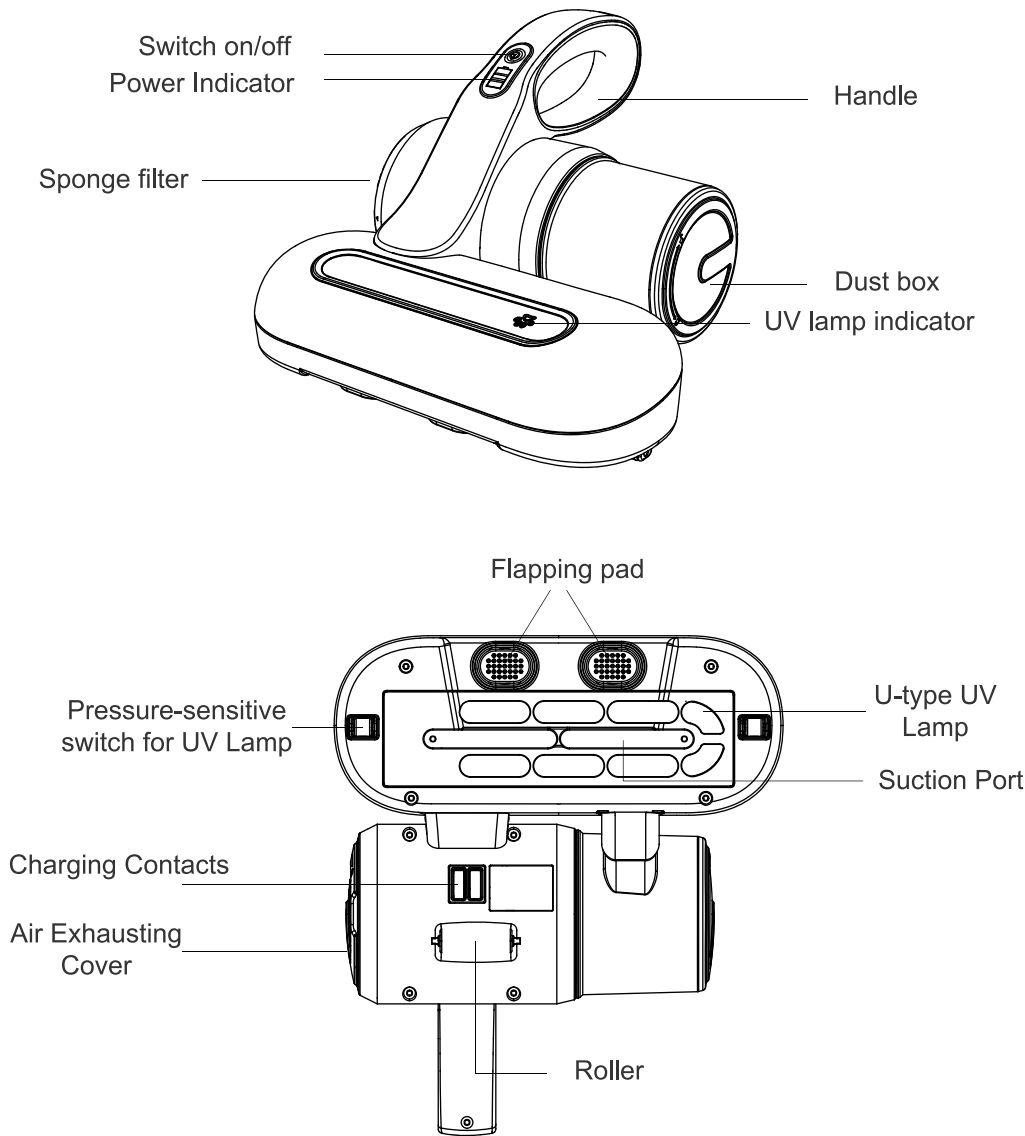




# To know your Mamibot UVLITE 100

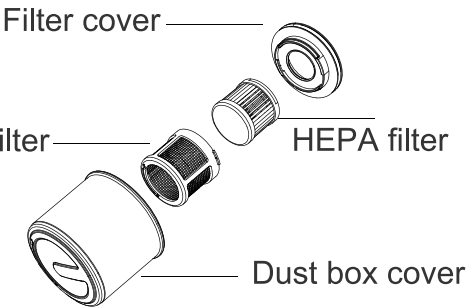

Dust box set  
(Installed inside main  
body)

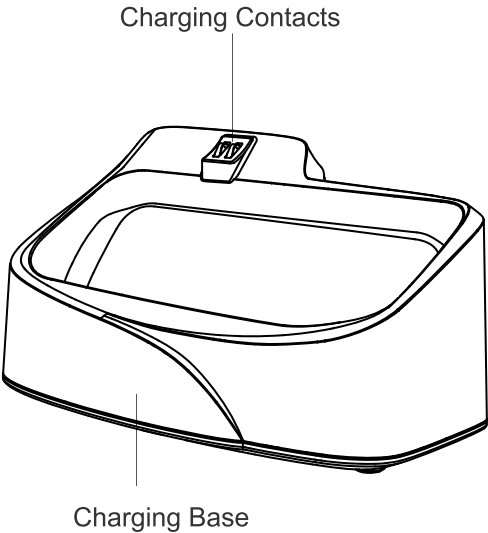

## How to use?

### Preparation before using


1. Please make sure that the cleaner's parts are all installed in correct position.
2. Please be sure the cleaner is fully charged. Please charge the device at least 3 hours before first use.

### Charging

Please connect the charging base to power supply via adapter first.

Please place the UVLITE 100 on the charging base.

Normally it will take 3-4 hours to full charge the device.

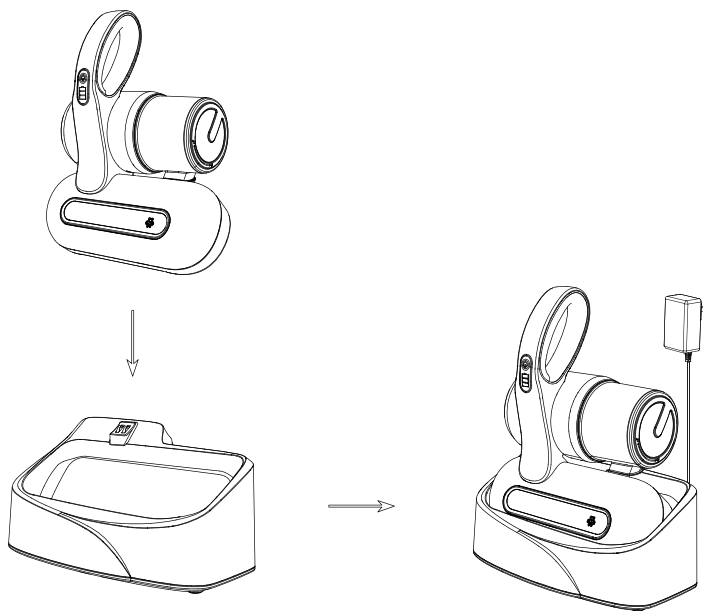


**How to charge your UVLITE100**

## Start to use




1. Press on the switch on/off button for 1 second to turn on the device.
2. When the device contacts tight on the to-be-cleaned surface, the pressure-sensitive switches will be activated, and the UV Lamp will light on, with blue indicator light from the indication window. When it is moved off the objects, or lifted up, the pressure-sensitive switches will be turned off and the UV lamp will be turned off too.

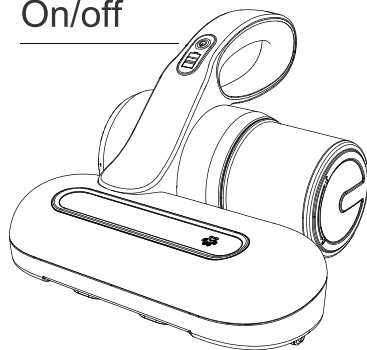On/off



Remarks: the UV lamp is designed to turn off when lifted from surface for the purpose of protecting animal/human beings from being hurt accidentally.

## Buttons and Indicator Light

1. Press the switch on/off  button to turn on. Press once again to turn off.
2. UV lamp is controlled by the two pressure-sensitive switches in bottom of the device, as long as one of the switches is break off (off from surface), the UV lamp goes off automatically.
3. When UV lamp is on, the signal  lights on. When the UV lamp is off, the signal  lights off.
4. When the power indicator has one flashing point, it is in low battery, please recharge. The device can't be turned on if it is not charged in three continuous cases of low battery, you have to recharge for second use.

## How to maintain?

### Charging

When the device is put on charging base, it starts charging and the device can't be turned on unless it is taken off from the charging base.

The power indicator flashes in a cycle of 5 seconds (light on/off) during charging process.

Charging based must be connected to adapter.

### Storage



Please store the device in a dry and cool place if it will not be in use for long time. Please don't put the device in any moist environment or expose it to strong sunshine condition.

### Cleaning the device

Please make sure UVLITE 100 is turned off and taken off from charging station before cleaning. Please use cotton cloth to wipe it clean, and don't let water or detergent wet any inside parts of the product.

## Cleaning Dust box and filters

1. Take off the dust box: hold the dust box (Fig. 1), rotates it in clockwise direction.
2. Clean the filtering set (Fig. 2): disassemble the dust box set, take off metal filter and HEFA filter. Rinse the metal filter and dry it for future use; knock HEFA filter to release retained dust. If HEPA filter is rinsed, please dry it completely for future use.
3. Replace the dust box sets only after the two filters are completely dry. Please make sure the dust box is properly placed on device and installed tight.
4. There is a sponge filter by the right side of device (Fig. 3). Please take off sponge filter as per unlock direction shown on the cover, rinse and dry it for future use.

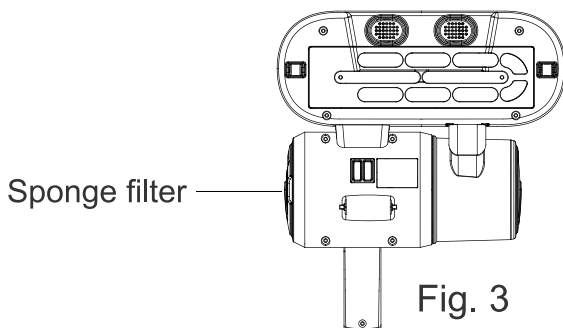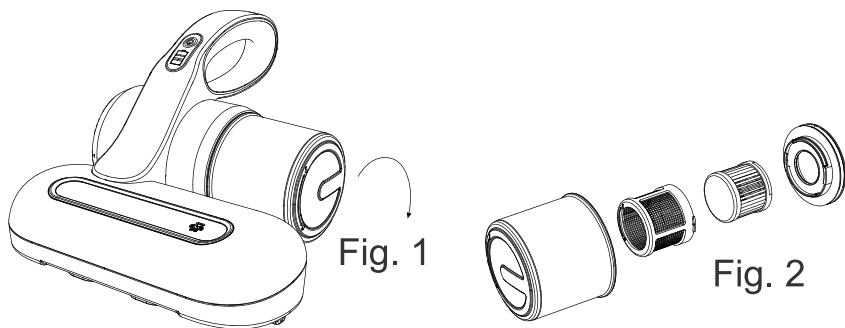

## Troubleshooting

Please read below form carefully for frequent questions and solutions

Problems	Causes	Solutions
Device doesn't work	<ol style="list-style-type: none"><li>1. Low power</li><li>2. Not switched on</li><li>3. Suction port is blocked</li><li>4. Dust box is full</li></ol>	<ol style="list-style-type: none"><li>1. Recharge the device</li><li>2. Turn on the device</li><li>3. Clean the suction port</li><li>4. Clean the dust box (as per cleaning procedures)</li></ol>
Device vacuuming power is low	<ol style="list-style-type: none"><li>1. Metal filter or HEPA filter blocked</li><li>2. Suction port blocked</li></ol>	<ol style="list-style-type: none"><li>1. Clean the filtering set</li><li>2. Clean the suction port</li></ol>
UV lamp doesn't work	<ol style="list-style-type: none"><li>1. The to-be-cleaned surface is uneven, or the device is not contacting surface tight</li><li>2. Pressure-sensitive switch is blocked by objects</li><li>3. UV Lamp broken</li></ol>	<ol style="list-style-type: none"><li>1. Seal the device bottom to the surface tight</li><li>2. Check and clean pressure-sensitive switch</li><li>3. Ask after-sales service for UV lamp replacement</li></ol>
Device is too noisy	<ol style="list-style-type: none"><li>1. Dust box is full</li><li>2. Suction port if blocked</li><li>3. Metal/HEPA filter is blocked</li></ol>	Stop using it, clean the device accessories. If it still won't work, please contact after-sales service.

## Specifications

Desc.	Cordless UV Vacuum Cleaner
Model no.	UVLITE 100
Rated power	100W
Max power	120W
Dust box	500ml
UV lamp	9W
N.W.	1.4KG
Charging time	3-4hrs
Rated working voltage	18V DC
Adapter Voltage	22V DC
Working time	25-30min
Charging Current	800mA
Battery	2200mAh

### Quality

Factories have been independently assessed by authorized Party for quality and production management.

### The Environment



The symbol on this appliance indicates that this application may not be treated as household waste. Instead it must be handed over to the applicable collection point for the recycling of electrical and electronic equipment. Disposal must be carried out in accordance with local environmental regulations for waste disposal. For more detailed information about treatment, recovery and recycling of this appliance, please contact your local city office, your household and waste disposal service or the shop where you purchased the product.



This appliance complies with the European Directives 2014/30/EU, 2014/35/EU, and 2014/53/EU.

### Your Guarantee

The guarantee conditions for this appliance are as defined by Mamibot representative in the country in which it is sold. Details regarding these conditions can be obtained from the dealer from whom the appliance was purchased. The bill of sale or receipt must be produced when making any claim under the terms of this guarantee.

## **Mamibot Manufacturing USA Inc.**

Orange St. #600, Wilmington, New Castle, 19899, Delaware, USA

Tel: 001 302-428-9888 Email: [sales@mamibot.com](mailto:sales@mamibot.com) [www.mamibot.com](http://www.mamibot.com)